



GX2

Batch Freezer

Features

Frigomat GX range meets the needs of professionals who want to offer their customers freshly made gelato. The equipment can be customized and introduced into existing locations (restaurant, café, gelato shop) or set up as an independent stand offering artisan gelato guaranteed by the Frigomat quality.

Manufactured in Italy by Frigomat to ensure Italian equipment quality and technology to serve gelato, ice cream or medium overrun frozen desserts. These machines are innovative and simple tools for producing, displaying, and selling an always *fresh product, made right in front of the customers!*

Double-function Cylinders

Two vertical cylinders completely independent for the maximum flexibility of use. The mix quantity for each batch is 2.5 quarts.

The cylinders feature a "Storage & Display" function and are equipped with thermostats to keep the product at the right temperature and ready for serving.

Simplicity of use

The system is extremely easy to use, simple to clean and to maintain.

The machines have an electromechanical control with adjustable production timer.

The steel beaters feature scraper blades simply removable for easy washing.

The units are equipped with a shower hose and the cleaning water drains directly out of the cylinders.

Lid: practical and safe

The lid is transparent for an easy inspection of the product during the freezing cycle. It features a safety "cut out" magnet which stops the agitation upon the lid opening. This system allows the operator to work safely and the option to add hard pieces - nuts, almonds, pistachios, raisins and chocolate for "stracciatella" flavor - during the freezing cycle.

Versions

Floor-standing unit.

Air or water cooled available.

Customization

These units have a large variety of options for customization purposes (canopy, shelves, protective glass ...). Also the graphic can be customized upon request.



3174126

Frigomat srl

Via 1°Maggio,28 – 26862 Guardamiglio (Lo), ITALY
Phone +39 0377-415011, Fax +39 0377-451079

www.frigomat.com

e-mail: info@frigomat.com

ABS & Taylor Enterprises, Inc.


5002 West 123rd Street, Alsip, Illinois 60803
Phone: 1-708-233-1472, Fax: 1-708-233-1467

www.absandtaylor.com

e-mail: info@absandtaylor.com



GX2 Batch Freezer

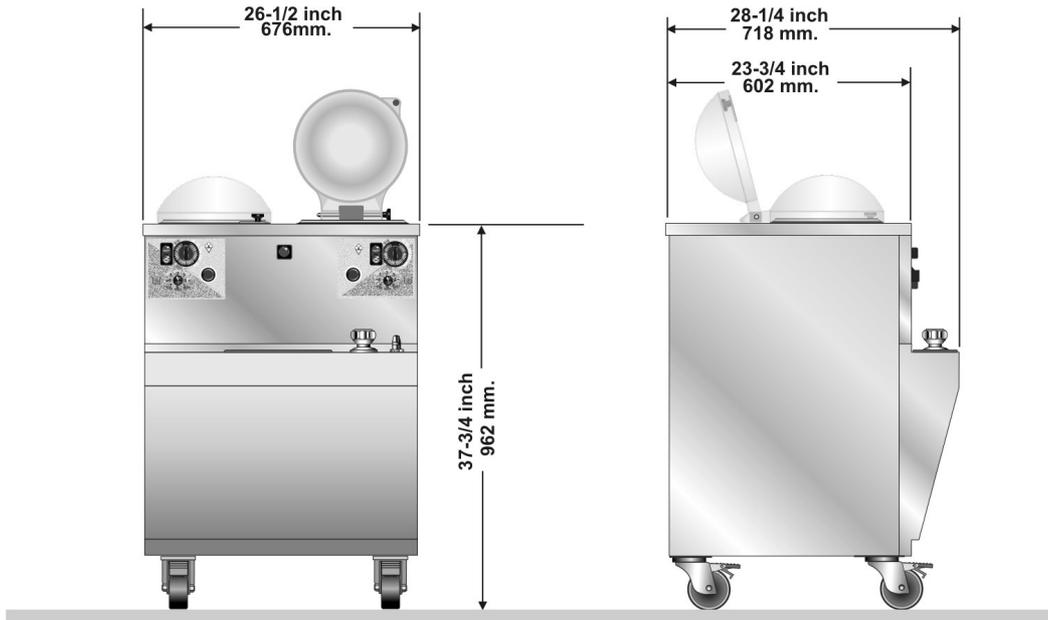

Weights	lbs.	kgs.
Net	375	170
Crated	485	220
Shipping Volume	cu. ft.	cu. m.
Crate	36.4	1.03

Dimensions	in.	mm.
Width	26-1/2	676
Depth	28-1/4	718
Height	37-3/4	962
<i>Counter Clearance: 4" mounted on standard legs.</i>		

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
115/60/1 Air	30 (x2)	20 (x2)	2P 3W
115/60/1 Water	30 (x2)	20 (x2)	2P 3W

(For exact electrical information, always refer to the data label of the unit)

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No | Cooling: Air Water NA
 Options: _____

Specifications

Electrical

Two dedicated electrical connections are required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

Freezing Cylinder

Two, 3.2 quart.

Beater Motor

Two, 1/2 HP.

Refrigeration System

Two, approximately 5700 BTU/hr. R404A (BTUs may vary depending on compressor used)

Air Cooled

Minimum 6" on lateral and rear sides. Minimum air clearances must be met to ensure adequate air flow for optimum performance.

Water Cooled

Water inlet and drain connections on the bottom 1/2" MPT.

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



ABS & Taylor Enterprises, Inc.

5002 West 123rd Street, Alsip, Illinois 60803
 Phone: 1-708-233-1472, Fax: 1-708-233-1467
www.absandtaylor.com
 e-mail: info@absandtaylor.com

FRIGOMAT
 ISO 9001:2000
 Registered Firm